

## JS-4 Series



### Introduction

JS-4 Interconnect box integrates the box body and various interfaces to provide an orderly, simple and compact conference connection solution. JS-4 series is of cover-lift wire-pulling structure. Lifting its inner plate of the panel and pulling out cable, it is ready for use; Put cables back into the box and close the inner plate, cables are concealed and the Interconnect box is flush to the table surface.

### Product Features

- It is designed with cover-lift, wire-pulling structure, containing up to 6 cables;
- When used, simply pull out cable for connection, easily and economically;
- With 1.7m cables;
- Top surface available in brushed black or silver finishes, custom finishes is accept.


CCC Certificate Number: 2013010201596383

CE Certificate Number: N° VTUPV-269/2011ZADR


ROHS Certificate Number: W02171017304C

### Main Specifications

Model	JS-4
Table Thickness	Maximal 60mm, 125mm(to be connected to extended part)
Temp. range	0 ~ 50°C (Non-condensing)
Weight	About 2.5kg~3kg
Dimensions	Panel: 157mm*131mm R=16mm Cutout Dimension: 148mm*122mm R=12mm Package: 200mm*170mm*200mm

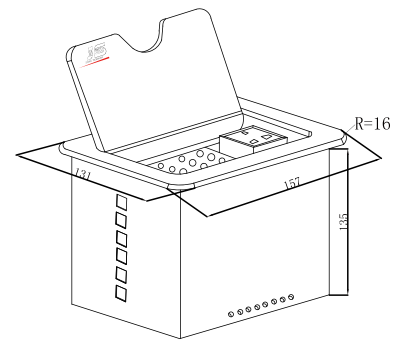

Overall Dimension (mm)

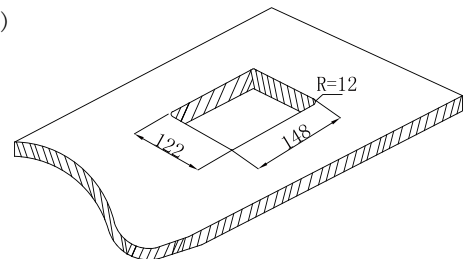

Cutout Dimension (mm)



### JS-440

- Universal AC Outlet \*1 (Can be replaced by US, UK, FR, 2-Pin Europe AU, SA power outlet.)
- Network \*1 (With 1.7m cable)
- Computer Video \*1 VGA 15-Pin HD
- Stereo Audio \*1 3.5mm audio
- USB \*1 Type A, Version USB2.0



### JS-440+

- Universal AC Outlet \*1 (Can be replaced by US, UK, FR, 2-Pin Europe AU, SA power outlet.)
- Computer Video \*1 VGA 15-Pin HD
- Stereo Audio \*1 3.5mm audio
- Network \*1 (With 1.7m cable)
- ※440+Cover-lifting and falling (sliding lid) structure;



Open



Black Panel



440+ Open



Closed



Silver Panel



440+ Closed

### AC OUTLET OPTIONS



Universal China UK 2-Pin Europe France US Australia SA